





Technical Data:


1. Rated at 1 Amp, 250 Volts AC; 3 Amps, 125 Volts; 6 Amps, 120 Volts AC.
2. Knob is available in black or white Hi-heat Phenolic .
3. Corrosion-resistant, nickel-finished components.
4. Two #18 AWM 105° C, 6" wire leads standard. Custom wire lengths are available.
5. UL File No. E85183; CSA File No. LR-41020.

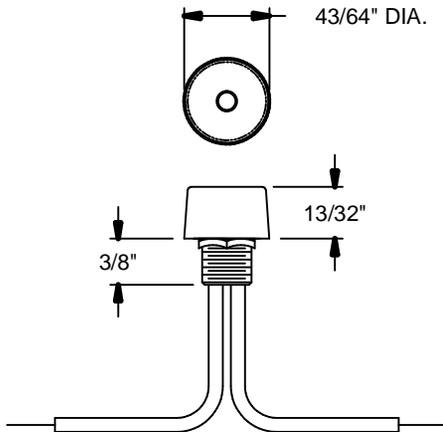


6-1825-W.9




Mounting Hole



Locknut
(Packed in Bulk)

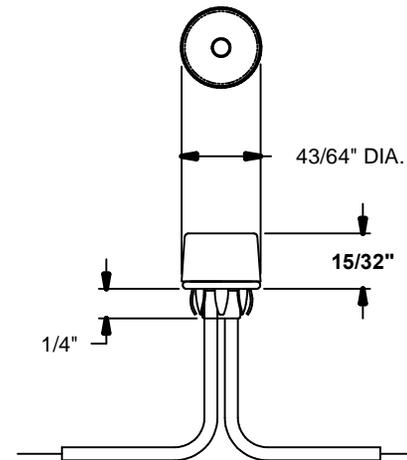

6-1827-W.9



Mounting Hole

Snap-in Mounting Clip fits into .50 dia. hole, keyed with 1/32" rad. (Mounting Surface Material .031" - .062" Thick)