





### Technical Data:

1. Switches are custom made only.
2. Operation is normally ON, momentary OFF.
3. Rated at 1/2 Amp, 250 Volts; 1 Amp, 125 Volts; 6 Amps, 120 Volts AC.
4. Silver plated contacts standard.
5. Body is Black Hi-Heat phenolic body. Black plastic plunger standard.
6. Corrosion-resistant, nickel-finish mounting clip.
7. .250" wide male terminals standard; also usable as solder lugs.
8. Plunger projection from flush to 17/32" standard (dash 3 = 13/32"), other lengths available.
9. UL File No. E85183; CSA File No. LR-41020-21.

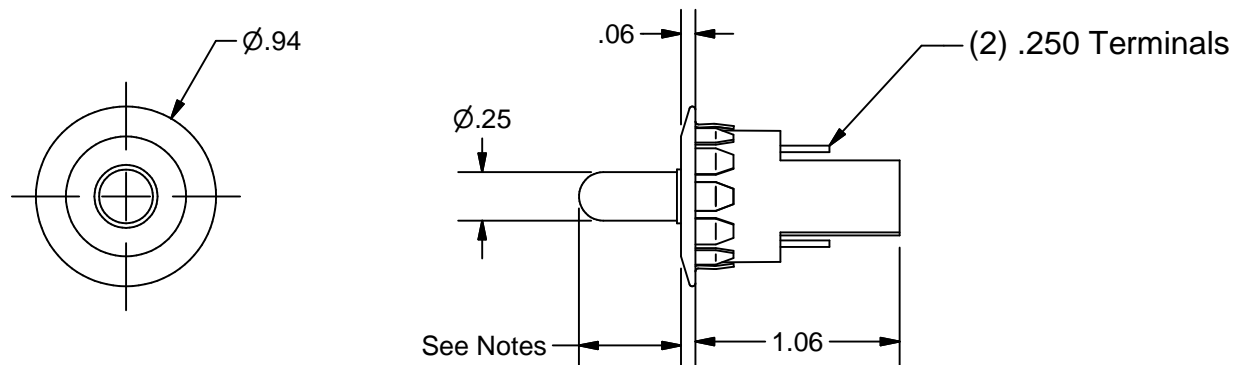

### Mounting Hole:

.747" - .750" Dia. Mounting Hole,  
Material .020" - .078" Thick